

MOUNTING INSTRUCTION

FREESTANDING CLICK-IN SYSTEM (PART ONE)

SINGLE-SIDED SOLUTION

Freestanding is one of the mounting options within the Click-in system. This option is ideal when you can't – or don't want to – mount your system directly on the wall e.g. when the wall can't carry the weight, there is a window or when you want to

leave the wall as it is. It's also perfect as a room divider, since the upright standards are double-sided.

Complement with the features you need for storage to fit e.g. clothing, garage or laundry room.

You need the following to assemble your solution:

- Mallet

ASSEMBLING A SINGLE-SIDED SOLUTION

Start by mounting the feet.

Either a plain foot: screw into the Foot for freestanding upright



Foot height extender



If you have chosen a foot height extender: Attach the extender first and then screw the foot into the extender.

You can choose the desired solution height, depending on how deep you screw the foot into the extender

Now insert the Uprights into the feet. The bottom of the upright is the part with the small holes on the side of the upright.




Using a mallet, press down and knock the upright into the slot of the foot. Make sure the upright goes all the way down.

Repeat the process with the second foot/upright.

Stabilization bars


Place the two pieces on the floor and insert the Stabilization bars in an "X" – using the holes on the sides of the uprights.

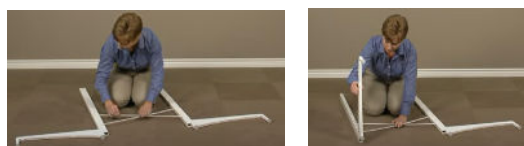


Turn up the upright pieces, using one hand – where the other fixates the stabilization bars.

Stand the unit upright.

Place the unit towards the wall – no more than 75 mm from the wall.

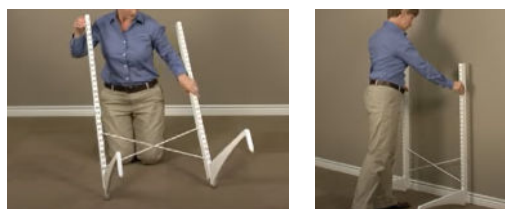

Secure the thicker stabilization bar between the uprights, using the mallet, ensuring they are completely into place. Alternate tapping the left and the right hand side.

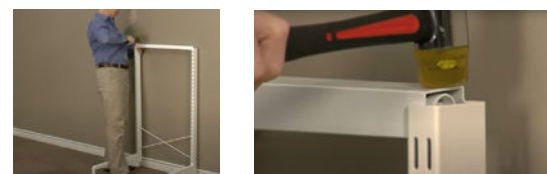

Place the two pieces on the floor and insert the Stabilization bars in an "X" – using the holes on the sides of the uprights.

Go on mounting your storage functions.

Otherwise follow the steps in part two adding an additional section and to make the solution double-sided.

MOUNTING INSTRUCTION

FREESTANDING CLICK-IN SYSTEM (PART TWO)

ADDING A SECTION AND ASSEMBLE A DOUBLE-SIDED SOLUTION

ADDING AN ADDITIONAL SECTION

Repeat the process with feet and upright – and then place the additional upright with the front of the feet facing the current section.



Attach the stabilization bars in the hole.



Twist out the added upright so that the stabilization bars lock.

Place the end caps (and center caps if you have more than one section) on top of the uprights.



ASSEMBLING A DOUBLE-SIDED SOLUTION

Assemble the foot to the upright (in the same way like for a single-sided solution)

Then slide in and mount the “backside” foot with a leveller.



Repeat with the second upright.



Then attach the stabilization bars in an “X”, with the upright sections placed as a “T”.



Then twist to make the two uprights/feet parallel.

BOTTOM WIRE SHELF

If you are adding a Wire shelf at the bottom (on top of the foot), use the special designed clips to attach the shelf on front and back.



REMEMBER TO FINETUNE

Make sure to finetune the height of the feet (with the included wrench) in order to have your system level.

